MIDI BOX 4
QUICK START GUIDE

DISASTER AREA DESIGNS

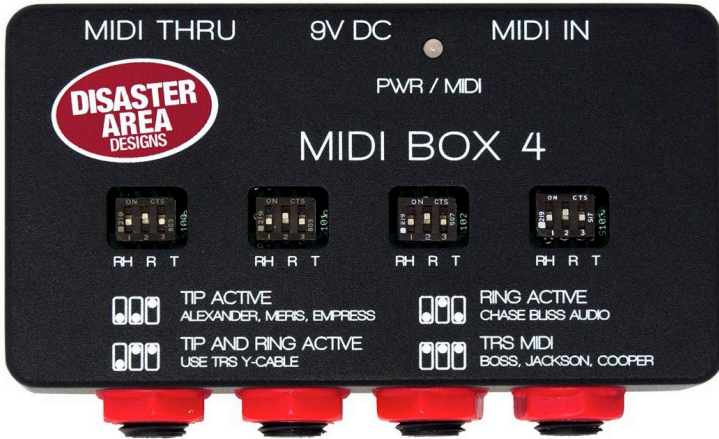**MIDI THRU:** CONNECT TO NEXT MIDI DEVICE INPUT

9V DC: CENTER NEGATIVE 20mA MINIMUM

MIDI INPUT: CONNECT TO OUTPUT OF MIDI CONTROLLER

MIDI THRU   9V DC   MIDI IN

PWR / MIDI

DISASTER AREA DESIGNS

MIDI BOX 4

R H R T   R H R T   R H R T   R H R T

TIP ACTIVE ALEXANDER, MERIS, EMPRESS

RING ACTIVE CHASE BLISS AUDIO

TIP AND RING ACTIVE USE TRS Y-CABLE

TRS MIDI BOSS, JACKSON, COOPER

CONTROL PORTS:
USE SWITCHES TO CONFIGURE EACH PORT

TIP ACTIVE: SENDS MIDI DATA TO TIP OF PORT

RING ACTIVE: SENDS MIDI DATA TO RING OF PORT

TIP AND RING ACTIVE: SENDS MIDI TO BOTH TIP AND RING AT THE SAME TIME

TRS MIDI: SENDS MIDI DATA TO TIP OF PORT WITH RING SET TO 5V. SUPPORTS MIDI TRS SPECIFICATION

STATUS LED:

POWER ON

MIDI ACTIVITY

---

disasterareadesigns.com